

Blue Seal 16

Raccordi a compressione

Compression fittings
Raccords à compression
Accesorios compresión

O-ring



Scheda tecnica

Technical features | Fiche technique | Ficha técnica

CODE

0 125 B



**Gomito a 90°
filettato femmina**

**90° female
elbow**

**Coude à 90°
taraudé**

**Codo a 90°
hembra**

Ghiera **[PP]**

Anello di
aggraffaggio **[POM]**

Anello di
battuta **[PP]**

O-ring **[NBR]**

Corpo **[PP]**

Nut **[PP]**

Grip
ring **[POM]**

Spacer
ring **[PP]**

O-ring **[NBR]**

Body **[PP]**

Ecrou **[PP]**

Bague
d'agrafe **[POM]**

Douille de
poussée **[PP]**

O-ring **[NBR]**

Corp **[PP]**

Tuerca **[PP]**

Cono de
fijación **[POM]**

Anillo prensa
junta **[PP]**

O-ring **[NBR]**

Cuerpo **[PP]**

SAB
cherish your water



SYSTEM GROUP



CODE: o 125 B

Blue Seal 16
O-ring


Gomito a 90° filettato femmina

90° female elbow


Coude à 90° taraudé

Codo a 90° hembra

Female threads



ISO 7/1 Parallel

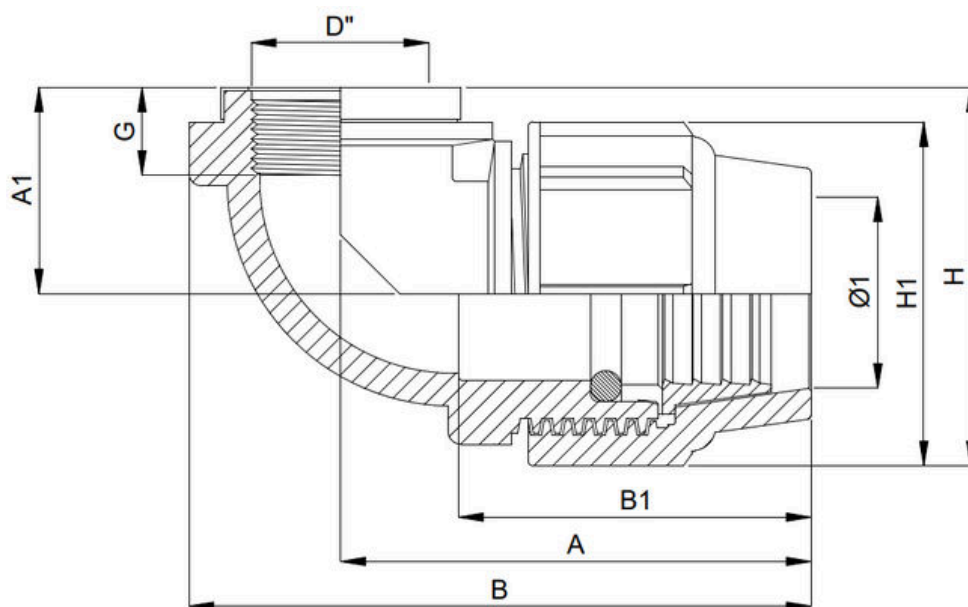

Code	Size (mm)	PN	Dimensions (mm)							Weight
Code	Ø1 x D''	bar	B	H	B1	H1	G	A	A1	gr
012501600BB	16 x 1/2"	16	73	54	46	49	18	57,5	29,5	32
012501600CB	16 x 3/4"	16	75	59	46	49	19	56,5	34,5	36
012502000BB	20 x 1/2"	16	89	60	50	47	14	69,0	36,5	50
012502000CB	20 x 3/4"	16	89	67	50	47	18	68,5	43,5	55
012502500BB	25 x 1/2"	16	95	66	53	54	15	75,0	39,0	64
012502500CB	25 x 3/4"	16	95	66	53	54	19	72,5	39,0	66
012502500DB	25 x 1"	16	95	74	53	54	20	72,5	47,0	74
012503200BB	32 x 1/2"	16	106	76	63	65	15	87,0	43,5	100
012503200CB	32 x 3/4"	16	109	78	63	65	19	86,1	45,5	105
012503200DB	32 x 1"	16	113	80	63	65	19	85,5	47,5	113
012503200EB	32 x 1 1/4"	16	113	82	63	65	20	85,0	49,5	140
012504000DB	40 x 1"	16	140	101	72	83	22	111,0	59,5	198
012504000EB	40 x 1 1/4"	16	145	103	74	83	23	109,0	61,5	223

• Anello di rinforzo (inox AISI 430) da 1" 1/2 a 4" | Reinforcing ring (stainless steel AISI 430) from 1" 1/2 to 4"

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)



CODE: o 125 B

Blue seal 16
O-ring


Gomito a 90° filettato femmina

90° female elbow


Coude à 90° taraudé

Codo a 90° hembra

Female threads



ISO 7/1 Parallel

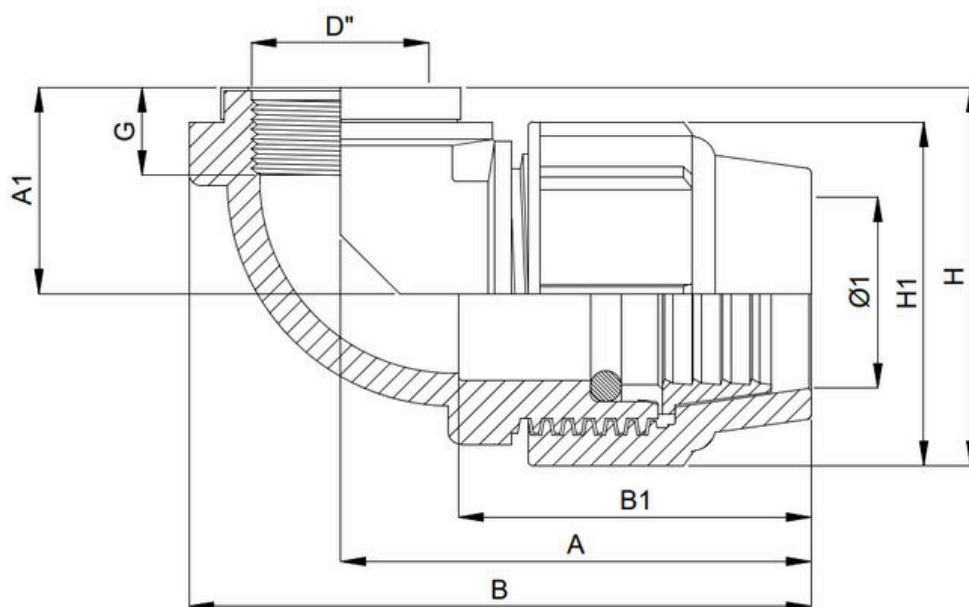

Code	Size (mm)	PN	Dimensions (mm)							Weight
Code	Ø1 x D''	bar	B	H	B1	H1	G	A	A1	gr
012504000FB	40 x 1"½	16	140	106	72	83	24	104,0	64,5	250
012505000EB	50 x 1"¼	16	156	119	85	97	24	124,0	70,5	300
012505000FB	50 x 1"½	16	163	118	85	97	25	124,0	69,5	334
012505000GB	50 x 2"	16	159	121	85	97	25	117,5	72,5	377
012506300FB	63 x 1"½	16	193	135	106	114	25	153,5	78,0	524
012506300GB	63 x 2"	16	198	138	106	114	28	153,0	81,0	550
012506300IB	63 x 2"½	10	193	143	106	114	29	144,0	86,0	648
012507500IB	75 x 2"½	10	225	146	120	133	29	168,0	79,5	855
012507500LB	75 x 3"	10	225	170	120	133	33	167,5	103,5	940
012509000LB	90 x 3"	10	264	178	145	154	33	198,0	101,0	1337
012509000MB	90 x 4"	10	263	206	145	154	38	196,0	129,0	1407
012511000MB	110 x 4"	10	333	218	184	188	38	256,0	124,0	2110

• Anello di rinforzo (inox AISI 430) da 1" ½ a 4" | Reinforcing ring (stainless steel AISI 430) from 1" ½ to 4"

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)